



TEXAS INSTRUMENTS



DISCONNECT POWER
BEFORE REMOVING

◀ FLEX CABLE INTERFACE

◀ FLEX CABLE INTERFACE


FLEX CABLE INTERFACE

INPUT POWER REQUIREMENTS: +7.5 TO +10.0 VDC @ 0.300 AMPS

ASSEMBLED IN U.S.A WITH DOMESTIC AND FORGEIGN COMPONENTS.

SERIAL
NO.



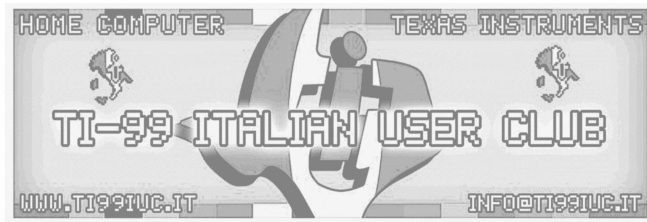

Editing and digital rework in 2022 by:

TI99 Italian User Club

(info@ti99iuc.it) Downloaded from www.ti99iuc.it